


HCBC High Current Busbar Clamp



- Connects copper busbar to copper busbar, nVent ERIFLEX Flexibar or power shunt
- Made with non-magnetic materials for high current connections between nVent ERIFLEX Flexibar and rigid busbars such as transformer terminals
- Rigid design assures even contact pressure
- Installs quickly and easily
- Ideal for on site modifications
- RoHS compliant

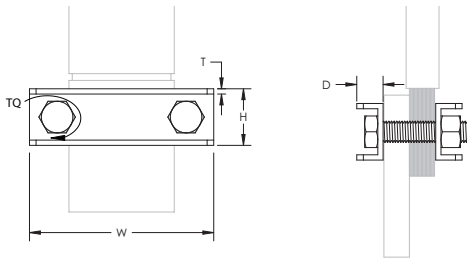

Material: Stainless Steel 304 (EN 1.4301)
Clamping Capacity: 40 mm



Part Number	Article Number	Conductor Width	Depth D	Height H	Width W	Thickness T	Torque TQ	Unit Weight
HCBC80	553100	80 mm	20 mm	40 mm	140 mm	3 mm	100 N-m	0.84 kg
HCBC100	553110	100 mm	20 mm	40 mm	160 mm	3 mm	100 N-m	0.92 kg
HCBC120	553120	120 mm	20 mm	40 mm	180 mm	3 mm	100 N-m	1.00 kg

Use two clamps for optimal contact pressure.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.