



# Neutral Bar for TD Distribution Blocks



- Attaches to four pole distribution blocks for increased wire capacity
- Direct electrical connection
- Strong mechanical assembly
- Transparent protection cover
- Halogen free
- RoHS compliant

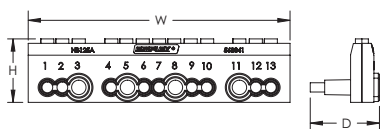

Part Number	NB-125A	NB-160A
Article Number	563841	563201
Max Current Rating, IEC	125 A	160 A
Short Term Withstand Current (I <sub>cw</sub> ) 1s	4.5 kA	6.2 kA
Peak Short Circuit Current (I <sub>pk</sub> )	30 kA	35 kA
Line Side Number of Connections	3	4
Line Side Compact Stranded Wire Size	10 - 25 mm <sup>2</sup>	10 - 35 mm <sup>2</sup>
Line Side Stranded Wire Size - Ferrule	6 - 16 mm <sup>2</sup>	10 - 25 mm <sup>2</sup>
Load Side Number of Connections	9	10
Load Side Compact Stranded Wire Size	2,5 - 6 mm <sup>2</sup>	2,5 - 16 mm <sup>2</sup>
Load Side Stranded Wire Size - Ferrule	1,5 - 6 mm <sup>2</sup>	1,5 - 16 mm <sup>2</sup>
Depth (D)	37.4 mm	41.4 mm
Height (H)	34.3 mm	
Width (W)	142 mm	170 mm
Unit Weight	0.17 kg	0.20 kg
For Use With	TD-100-125AL (563830) TD-100-125ALL (563840)	TD-160A (563200) TD-160AL (563990)
Flammability Rating	UL <sup>®</sup> 94V-0	
Complies With	IEC <sup>®</sup> 60947-7-1	

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

**WARNING**

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.