




CABS Busbar Support Kit



- For all busbar types and nVent ERIFLEX Erilink busducts
- Improve bending resistance by interlocking or stacking two profiles
- Quick and easy to install
- Halogen free insulators
- RoHS compliant

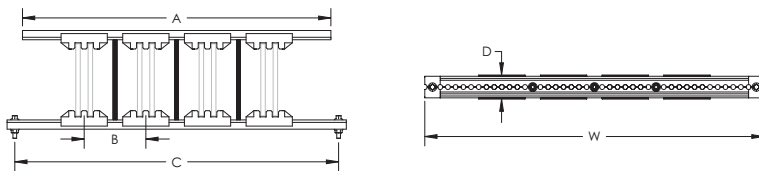

Material: Aluminum, Glass Fibre Reinforced Polyamide, Steel

Finish: Electrogalvanized

Typical Application Current Rating: 400 – 4,500 A

Max Working Voltage, IEC (Ui): 1,000 VAC, 1,500 VDC

Working Temperature: -40 to 130 °C

Complies With: IEC® 60439.1, IEC® 61439.1,

IEC® 60695-2-11 (Glow Wire Test 960 °C)

Flammability Rating: UL® 94V-0



Part Number	Article Number	Busbars per Phase	Busbar Width (mm)	Busbar Thickness (mm)	D (mm)	W (mm)	A (mm)	B (mm)	C (mm)	Unit Weight (kg)
CABS2-10TN-400	549320	1 – 2	30 – 120	10	39	350	300	75	325	0.77
CABS2-10TN-600	549270	1 – 2	30 – 120	10	39	550	500	75 – 125	525	0.81
CABS4-5TN-400	549310	1 – 4	30 – 125	5	39	350	300	75	325	0.80
CABS4-5TN-600	549260	1 – 4	30 – 125	5	39	550	500	75 – 125	525	0.84

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.