



CFBS Flat Busbar Support



- Universal busbar support
- End cover available to prevent busbar from sliding out of position
- Clips available to accommodate multiple busbar widths
- RoHS compliant

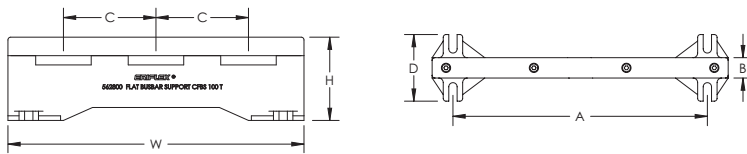

Max Working Voltage, IEC (Ui): 1,000 VAC, 1,500 VDC

Working Temperature: -15 to 140 °C

Typical Application Current Rating: 630 – 1,200 A

Complies With: IEC® 61439.1

Flammability Rating: UL® 94V-0



Part Number	Article Number	Busbars per Phase	Busbar Width (mm)	Busbar Thickness (mm)	D (mm)	H (mm)	W (mm)	A (mm)	B (mm)	C (mm)	Unit Weight (kg)
CFBS100T	562800	1	60	10	61	70	320	275	22	100	0.436

Supports 40 mm and 50 mm [1.57" and 1.97"] busbar widths with optional CFBS flat busbar clips.

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.