


# FBS Flat Busbar Support



- Support for threaded busbars
- Three phase with neutral circuit
- Plastic positioning pin for bar location
- Adjusts quickly to accommodate multiple busbar widths
- Protection screen can be fixed using spacers
- A ground can be mounted on either side
- Halogen free

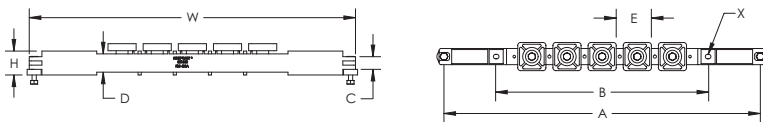

Material: Steel, Glass Fibre Reinforced Polyamide, Aluminum

Finish: Electrogalvanized

Max Working Voltage, IEC (Ui): 1,000 VAC, 1,500 VDC

Working Temperature: -40 to 130 °C

Typical Application Current Rating: 160 – 400 A

Complies With: IEC® 61439.1,

IEC® 60695-2-11 (Glow Wire Test 960 °C)

Flammability Rating: UL® 94V-0

Busbar Width: 15 mm, 20 mm, 32 mm

Busbar Thickness: 5 mm



Part Number	Article Number	Height H	Width W	A	B	C	D	E	X	Unit Weight
FBS400A	551350	34 mm	465 mm	450 mm	300 mm	18 mm	26 mm	50 mm	6 x 8 mm	0.3 kg

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cULus and cURus are registered certification marks of UL LLC.

#### WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.