



FBSS Flat Busbar Support



- Supports busbars at an angle for easy connections
- Includes mounting holes for direct fixing of protection screen
- Adjustable arms for easy mounting
- Three phase with neutral circuit
- Halogen free

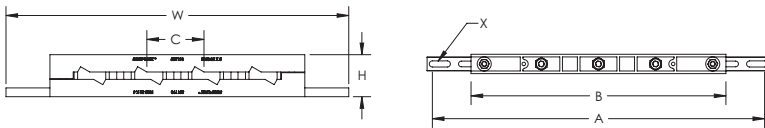

Material: Steel, Glass Fibre Reinforced Polyamide, Aluminum

Max Working Voltage, IEC (Ui): 1,000 VAC, 1,500 VDC

Working Temperature: -40 to 130 °C

Typical Application Current Rating: 400 A

Flammability Rating: UL® 94V-0

Busbar Width: 32 mm

Busbar Thickness: 5 mm

Complies With: IEC® 60695-2-11 (Glow Wire Test 960 °C)



Part Number	Article Number	Height H	Width W	A	B	C	X	Unit Weight
FBSS32X5	551190	47 mm	338 – 390 mm	325 – 377 mm	290 mm	65 mm	6.5 x 23 mm	0.316 kg

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.