



UCFBS-60-T Busbar Support



- Universal busbar support
- End cover available to prevent busbar from sliding out of position
- Halogen free
- RoHS compliant

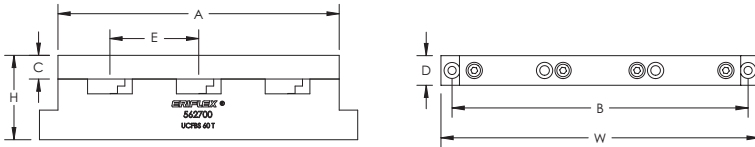

Material: Polyamide

Max Working Voltage, IEC (Ui): 1,000 VAC, 1,500 VDC

Working Temperature: -15 to 130 °C

Typical Application Current Rating: 160 – 630 A

Flammability Rating: UL® 94V-0

Busbar Width: 15 mm, 20 mm, 25 mm, 30 mm

Busbar Thickness: 5 – 10 mm



Part Number	Article Number	Depth D	Height H	Width W	A	B	C	E	Unit Weight
UCFBS-60-T	562700	20 mm	56 mm	215 mm	190 mm	200 mm	16 mm	60 mm	0.19 kg

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.