




Universal Busbar Support with Neutral Circuit



- Universal fixing system
- Installs quickly and easily
- Extremely robust construction
- Adjustable arms for easy mounting
- Halogen free insulators

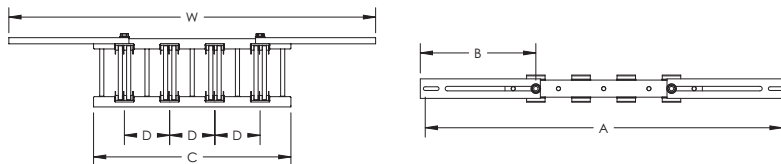

Material: Steel, Glass Fibre Reinforced Polyamide
 Max Working Voltage, IEC (Ui): 1,000 VAC, 1,500 VDC
 Working Temperature: -40 to 130 °C
 Complies With: IEC® 60439.1, IEC® 61439.1,
 IEC® 60695-2-11 (Glow Wire Test 960 °C)
 Flammability Rating: UL® 94V-0



Part Number	Article Number	Busbars per Phase	Busbar Width (mm)	Busbar Thickness (mm)	W (mm)	A (mm)	B (mm)	C (mm)	D (mm)
Typical Application Current Rating: 1,700 A									
UBS1-5TN	551000	1	30 – 125	5	380 – 610	360 – 590	176	300	70
Typical Application Current Rating: 2,250 A									
UBS1-10TN	551060	1	30 – 120	10	380 – 610	360 – 590	176	300	70
Typical Application Current Rating: 3,500 A									
UBS4-5TN	551010	1 – 4	30 – 125	5	585 – 895	560 – 865	281	480	110
Typical Application Current Rating: 3,600 A									
UBS2-10TN	551070	1 – 2	30 – 120	10	585 – 895	560 – 865	281	480	110
Typical Application Current Rating: 4,500 A									
UBS3-10TN	551090	1 – 3	30 – 120	10	585 – 895	560 – 865	281	480	110

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.